


Produktguide Betong

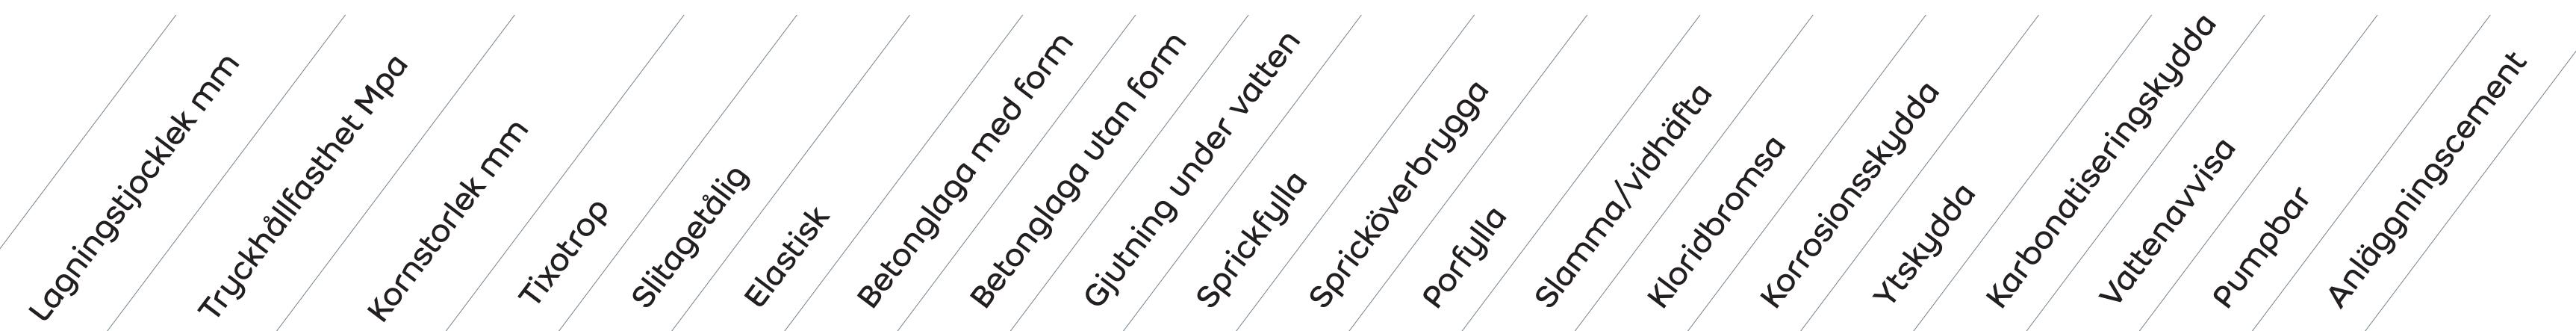

PRODUKT	PRODUKTSPECIFIKATION				ANVÄNDNINGSMRÅDE/FUNKTION												
SLAMNINGSBRUK																	
weber REP 05	2-3	>30	0-0,25					●		●	●	●	●	●	●		
weber betoheft anläggning	2-3	>30	0-0,25					●		●	●	●	●	●	●		●
LAGNINGSBRUK																	
weber REP 25 reparationsbruk	5-50	>30	0-2	●	●			●									
weber REP 45 reparationsbruk	5-50	>45	0-2	●	●			●									
weber REP 65 reparationsbruk Anläggning	5-50	>50	0-2	●	●			●									●
weber REP rapid	2-50	>15	0-1	●				●			●						
GJUTBETONG																	
weber REP 920 reparationsbetong 0-4	15-50	>50	0-4		●		●										
weber Pumpbetong 0-4	15-50	>50	0-4		●		●									●	
weber REP 922 reparationsbetong 0-12	>50	>60	0-12		●		●										
weber REP 930 anläggningsbetong 0-4	15-50	>50	0-4		●		●										●
weber REP 931 anläggningsbetong 0-4	>30	>50	0-4		●		●									●	●
weber REP 932 anläggningsbetong 0-12	>50	>60	0-12		●		●									●	
weber REP 933 anläggningsbetong	>50	>50	0-8		●		●									●	●
weber undervattensbetong	>30	>50	0-4		●		●		●							●	●
weber avjämning ute	10-80	>40	0-2		●		●									●	●
SPRUTBETONG																	
weber REP 965 TBS anl	>10	>45	0-2	●	●			●						●	●		●
weber REP 955 sprutbetong anl (PP-fiber)	>20	>60	0-4	●	●			●						●			●
weber sprutbetong reduce 0-4	>20	>70	0-4	●	●			●						●			●
weber sprutbetong reduce 0-8	>20	>70	0-8	●	●			●						●			●
FÄRG/IMPREGNERING/YTSKYDD																	
weber concrete impregnation													●				●
weber concrete impregnation creme					●								●				●
weber concrete paint												●		●	●		
weber strong betongfärg					●											●	
weber REP 990 betongskydd	2		0-0,5			●			●	●			●	●	●	●	●
weber REP 995 ytbeläggning naturgrå	2		0-0,5		●	●			●	●			●	●	●	●	
weber REP 995 ytbeläggning ljusgrå	2		0-0,5		●	●			●	●			●	●	●	●	