


EnveoVent Flex

ARBETSANVISNING



1. Ställning


1. A

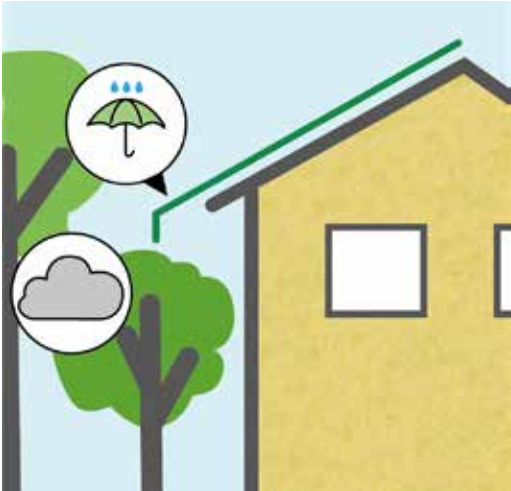


1. B



1. C

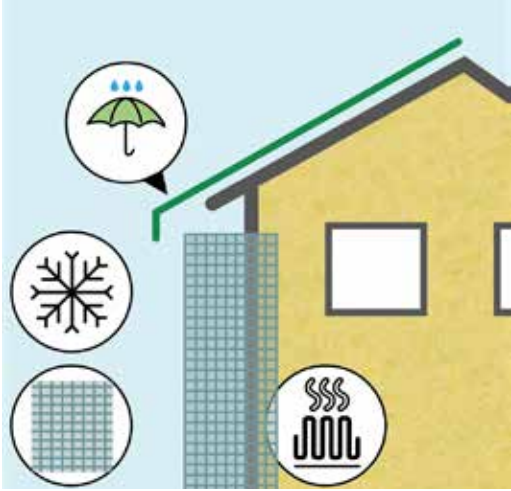

1. D




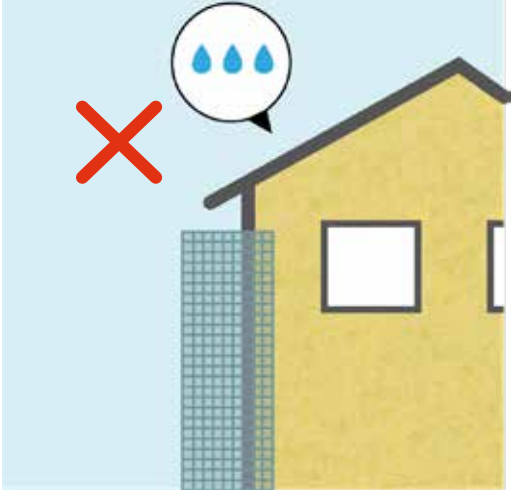


1. E




2. Isolering

webertherm 371 premium 32
weber musprofil

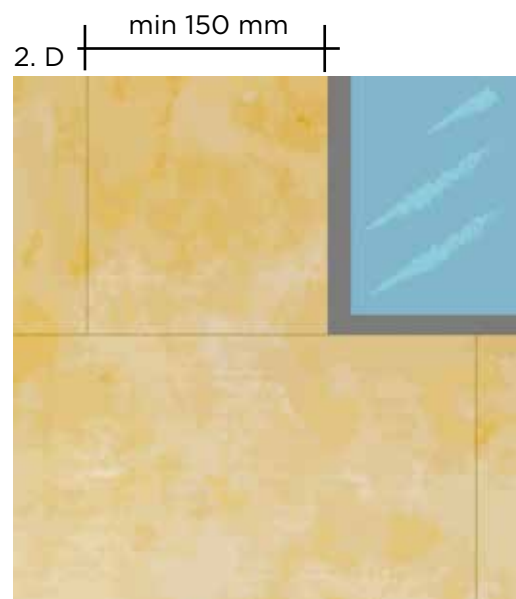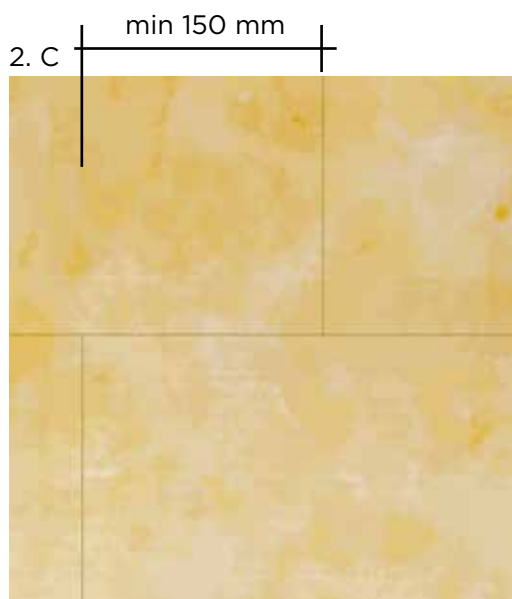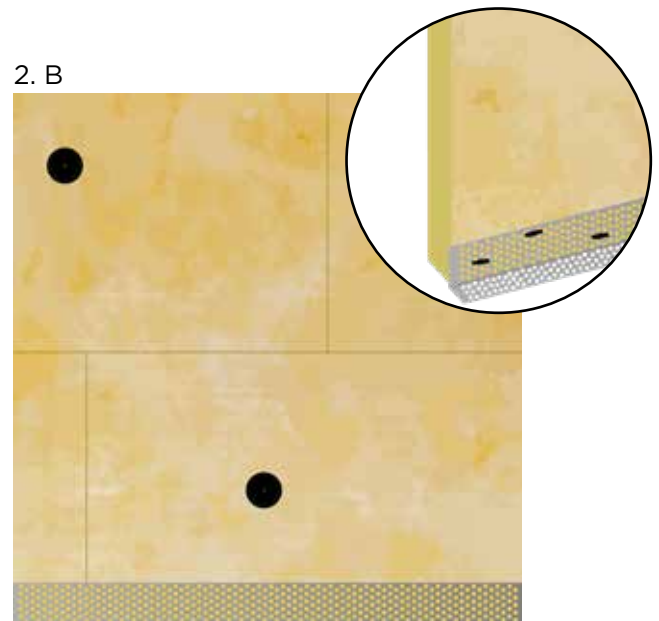
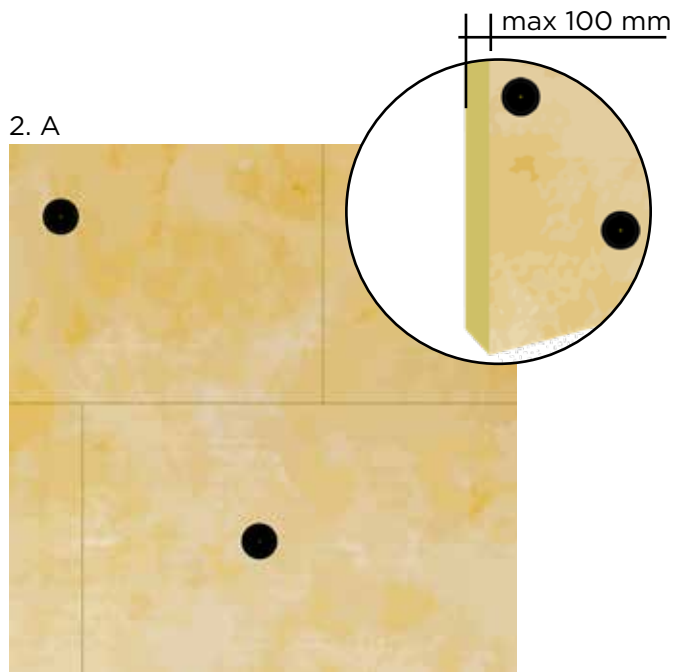


3. Regling


VAP-profil 25 mm alt. träläkt min 28x70 mm

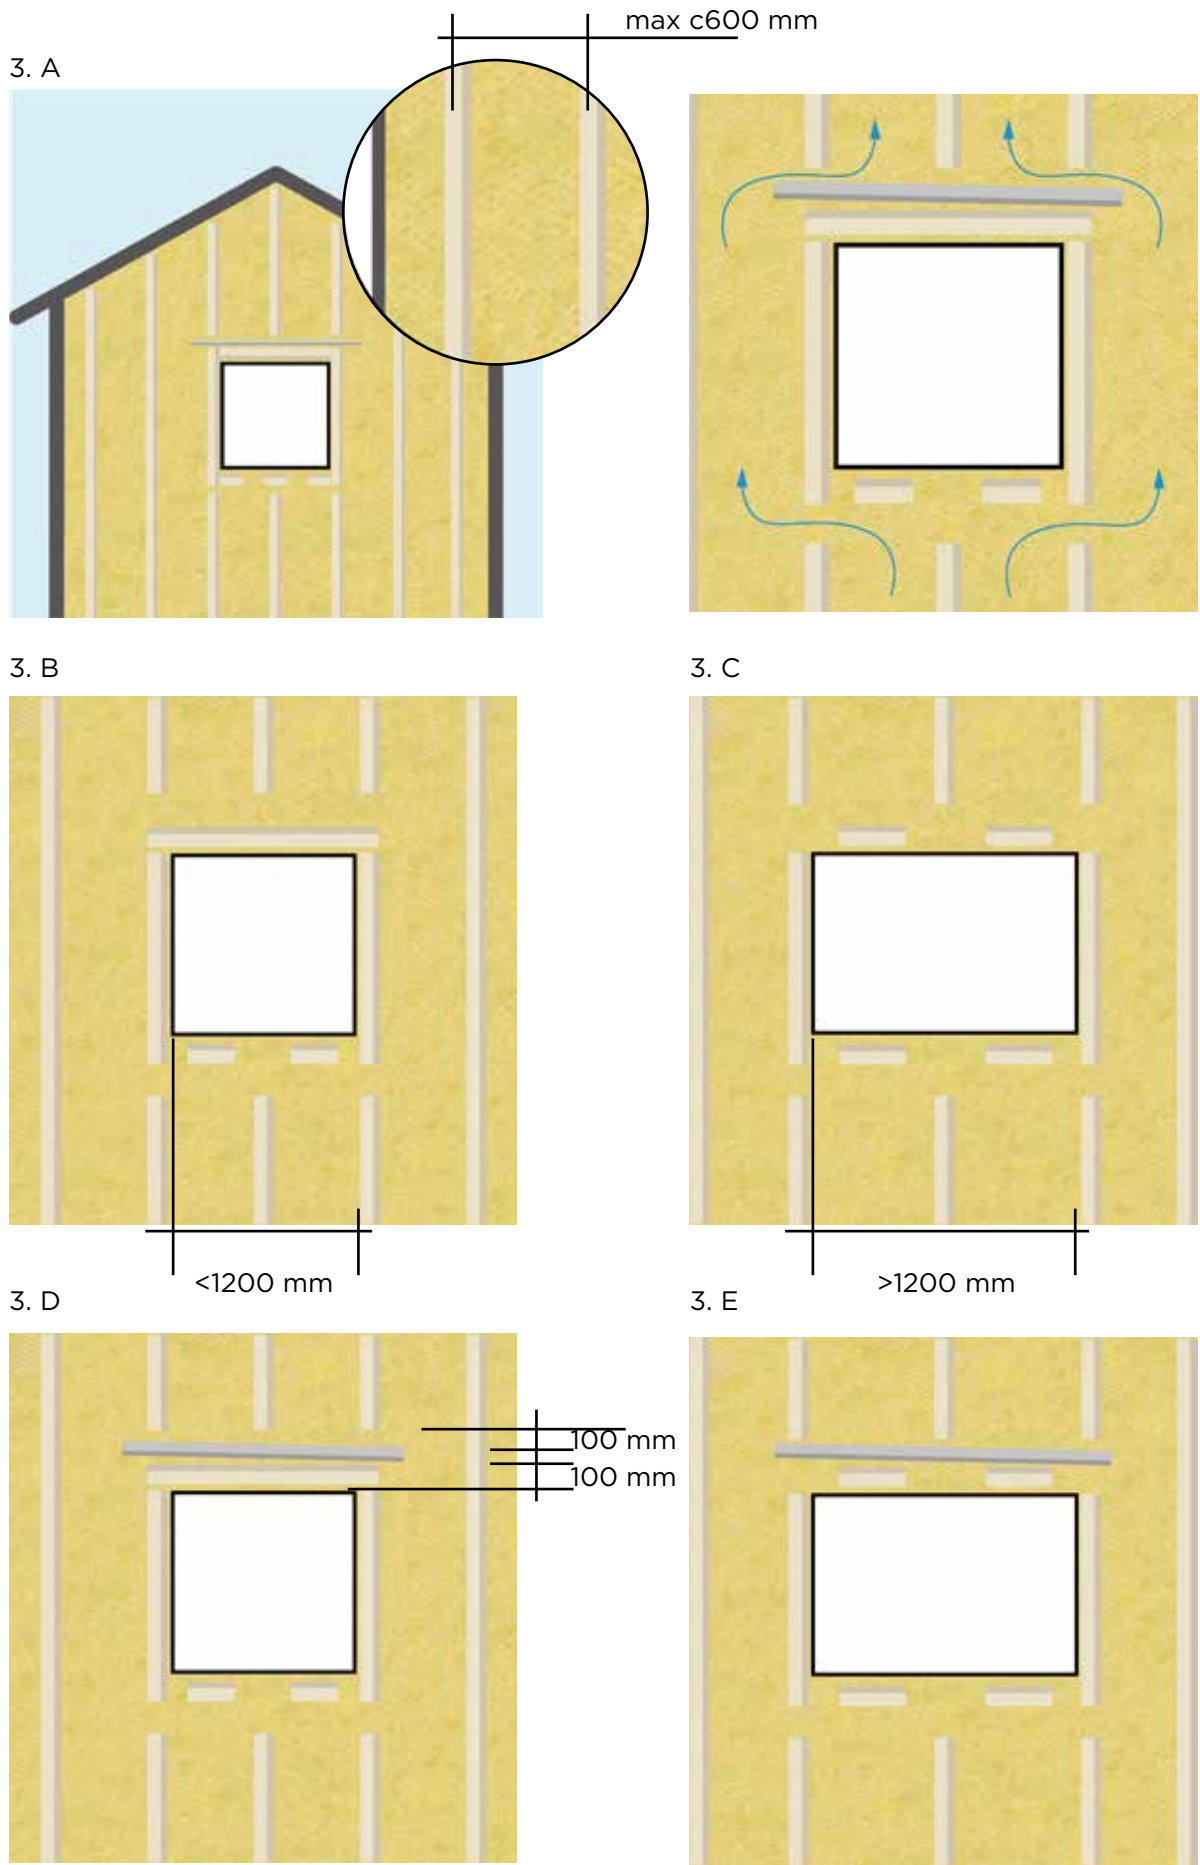

4. Lagring/Hantering

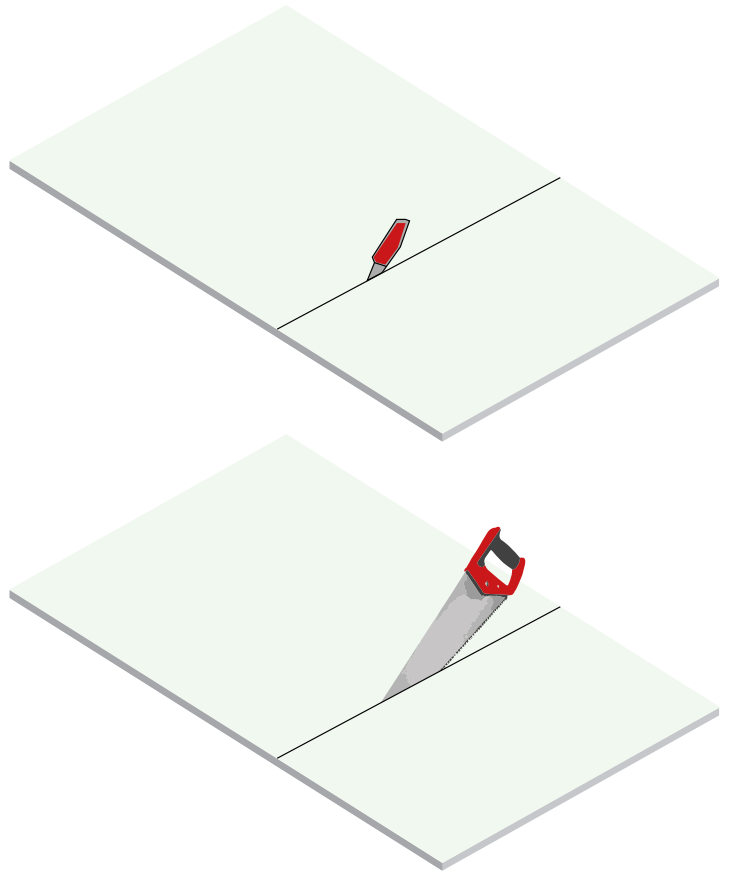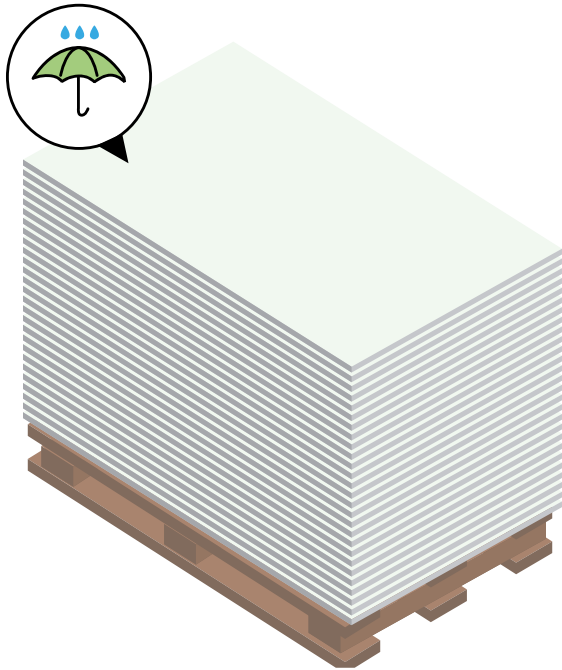

5. Vindlast

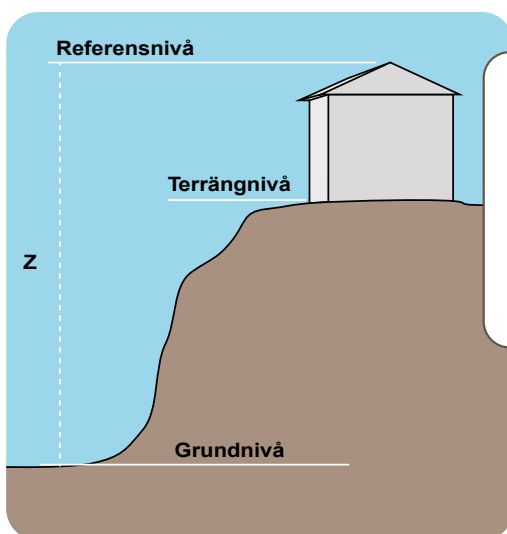

z = >20 m

kontakta:

Weber Tekniksupport






Telefon: 010-211 63 00

E-post: kontakt@weber.se

Chat: [se.weber](https://www.se.weber)

6. Placering




weber WP-skiva
weber EnveoVent startlist

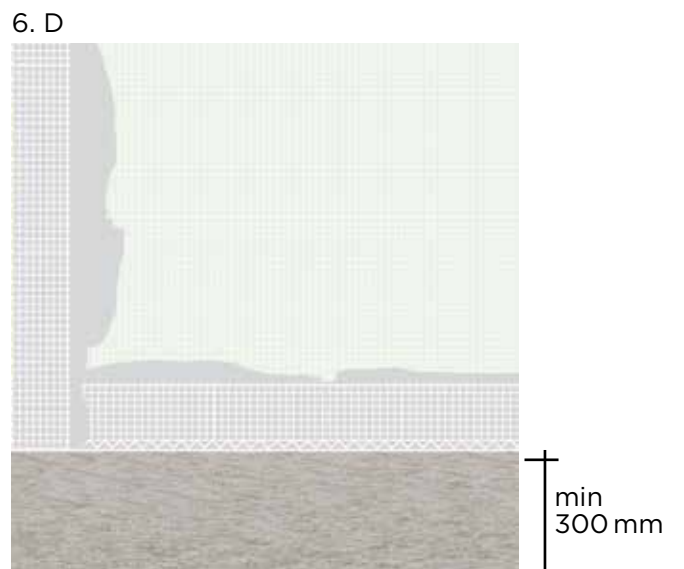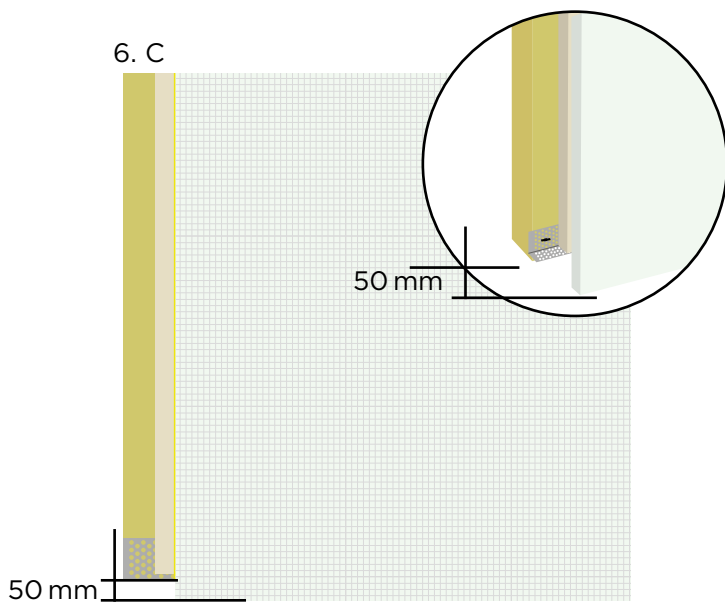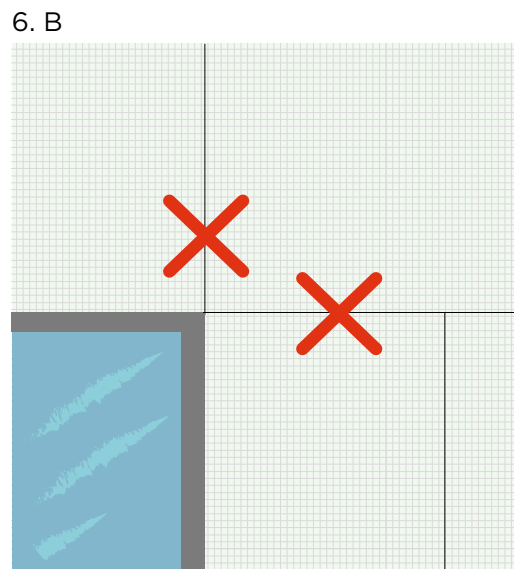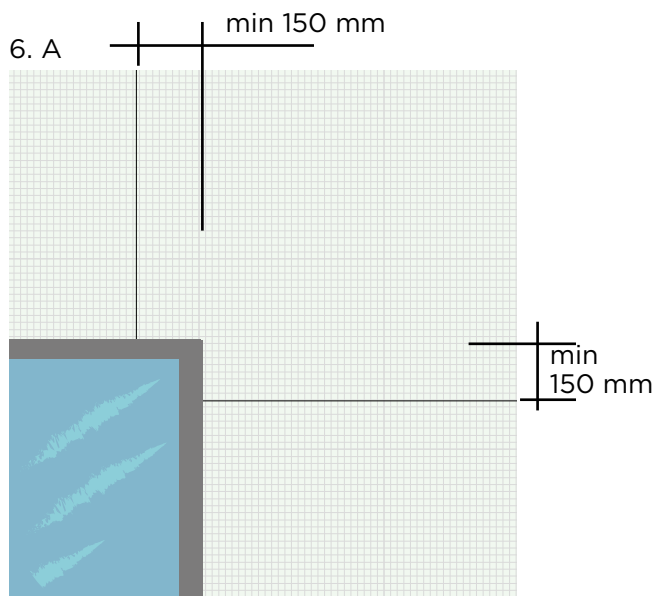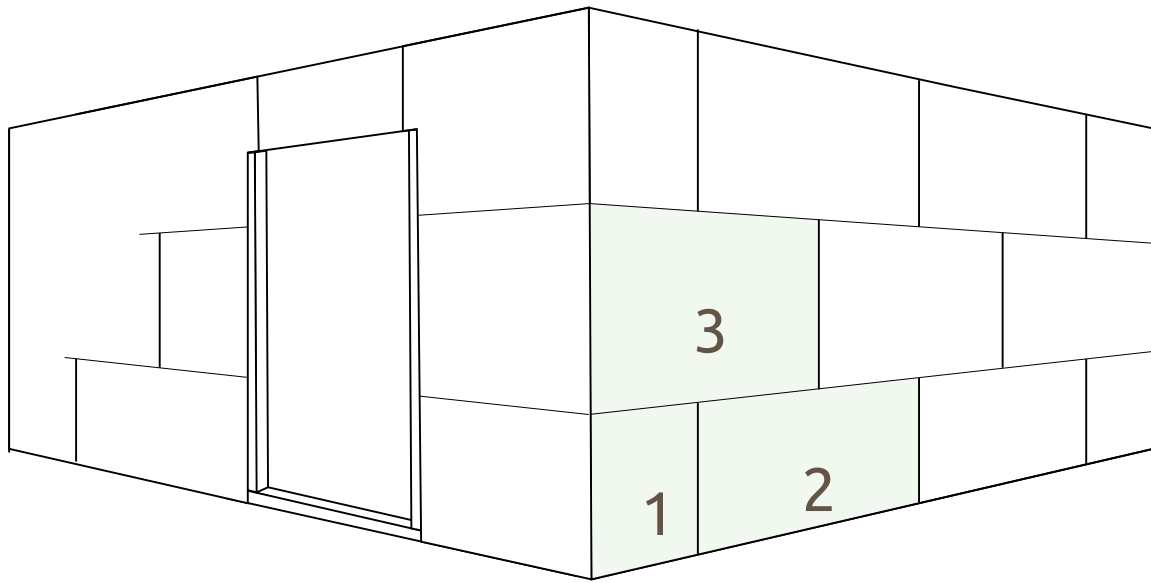


7. Skruvning

weber QU 32 EnveoVent skruv

7. A

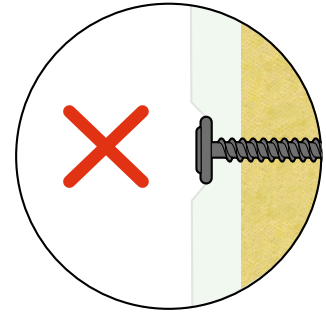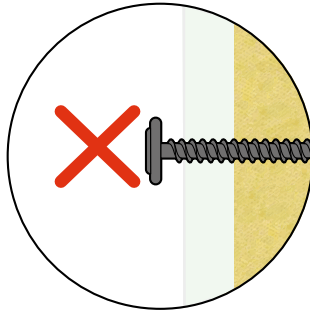
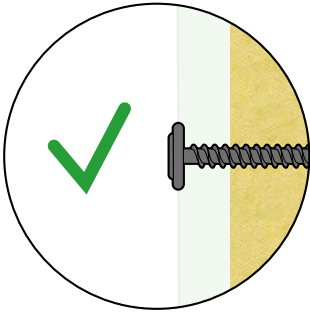


7. B

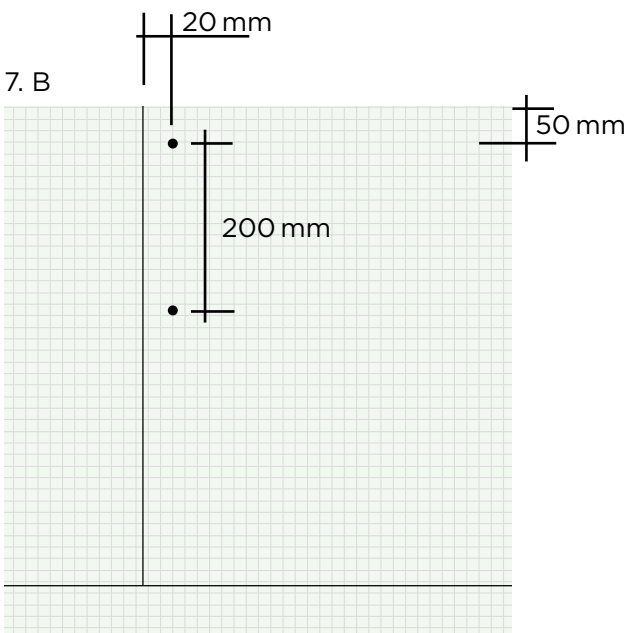



8. List- och hörnförstärkning

webertherm 391 hörnlist

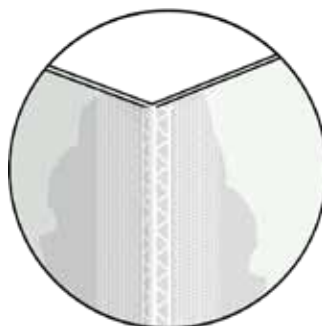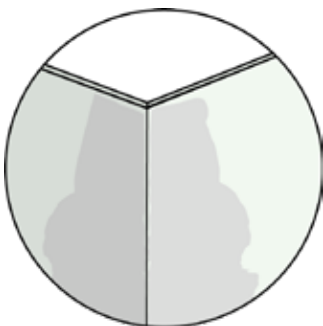

9. Rölsefogar


9. A

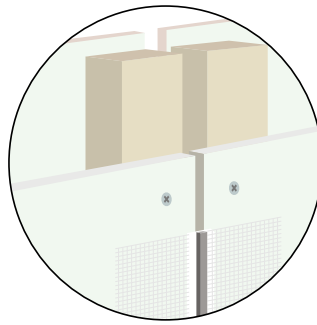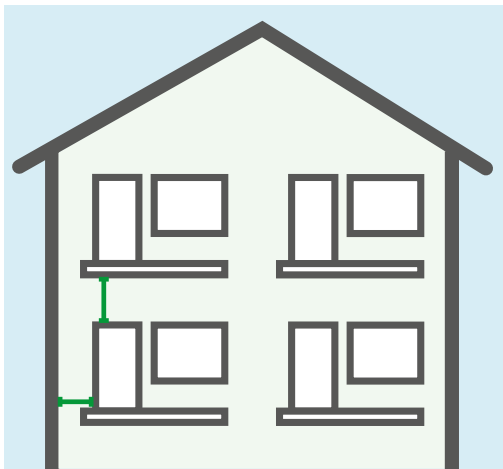

10. Putsning

weber flexiguard
weber 117 armeringsnät


10. A




10. B



10. C

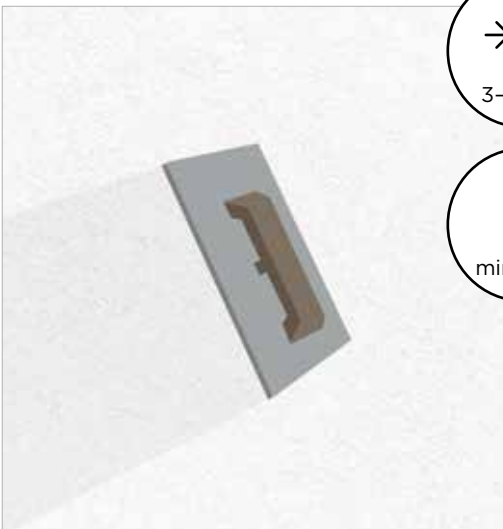


10. D

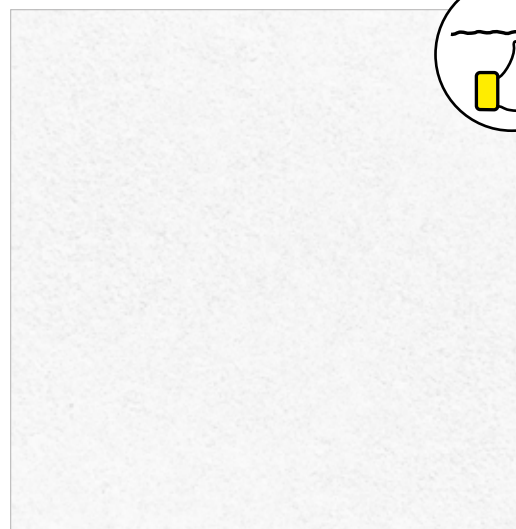



11. Ytputs

weber fasadfärg EF
weber fasadputs EF



11. A

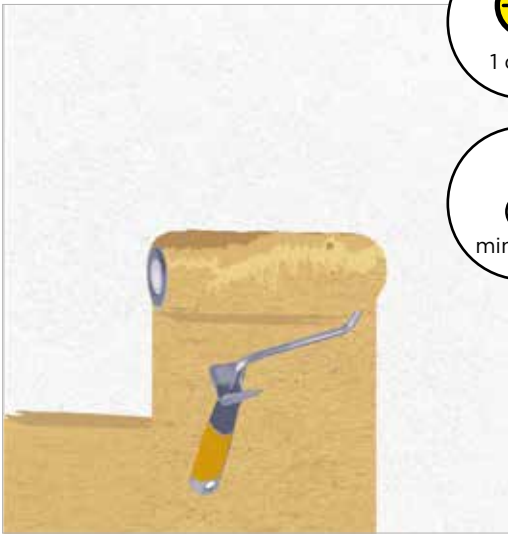

11. B

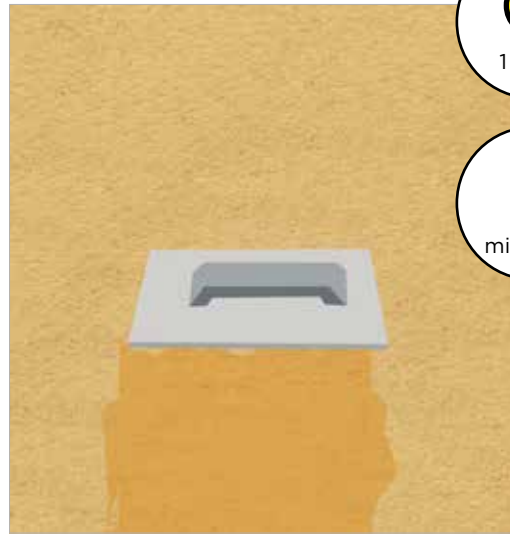

11. C

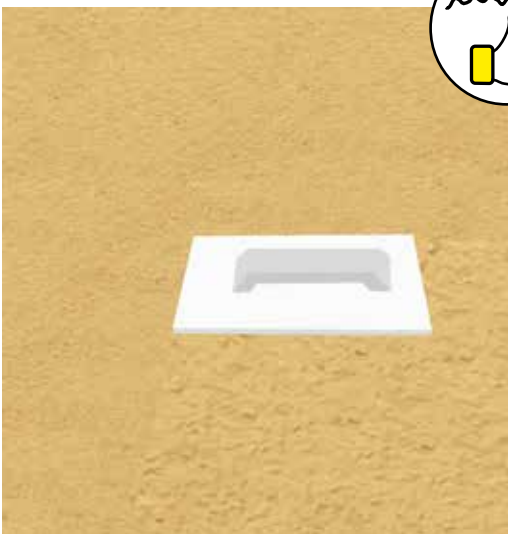

weber WP-skiva

weber flexiguard

weber 117 armeringsnät

weber flexiguard

weber fasadfärg/fasadputs EF



SAINT-GOBAIN SWEDEN AB
WEBER

Box 415, 191 24 Sollentuna
Tel.: (+46) 8 625 61 00
www.weber.se